




Ground reinforcement system

ECORASTER[®] TE30

Technical Data
Product features

ECORASTER® TE30 - The value for money grid

The value for money grid for normal loads.

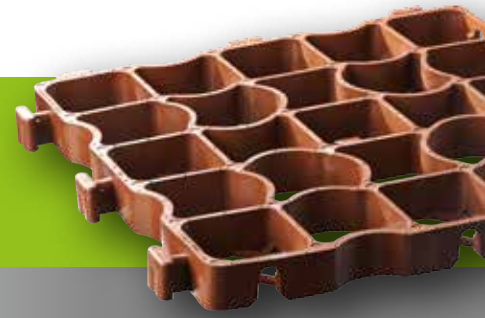

Wall height
1.2
in

Laying time
100
sq m/h



Technical specifications

| | |
|-----------------------|---|
| Dimensions | 13 in x 13 in x 1,2 in |
| Wall thickness | 0,17 in |
| Carrying load | Up to 600 t per sq m |
| Weight per sq m | 5,04 kg |
| Weight per unit | 0,56 kg |
| Wall height | 1,2 in |
| Material | 100% recycled PE (polyethylene) |
| Pressure resistance | Up to 20 t axle load in acc. with DIN 1072 |
| Dimensional stability | Temperature range -50° to +90° |
| Deformation | 0.5% (at normal temperatures +20 to +80 °) |
| Moisture absorption | 0.01% |
| Solubility | Resistant to acids, alkalis, alcohols, oil and petrol (de-icing salt, ammonia, acid rain, etc.) |

Suitable for

Equestrian sports

Outdoor riding arenas

Agriculture

Enclosure approaches

The value for money grid for normal loads.

The new improved formula ensures optimum dimensional stability and flexibility for greater safety and ground feel.

Certificates

| | |
|-----------------------------|--|
| Expected lifespan | Indefinite acc. to TÜV certificate |
| Carrying load | Up to 20 t axle load in acc. with DIN 1072 |
| Environmental compatibility | Environmentally neutral in acc. with DIN 38412 |
| 100% Made in Germany | |